

AUTOSTACKER™

PL-6SR/SRX

6,000-lbs. Capacity / Scissors Parking Lift Platform

The Autostacker is the latest-model parking lift to hit the home and commercial markets. With the strength to handle loads up to 6,000 lbs. and the minimal footprint necessary for a home garage lift, the Autostacker is the perfect garage parking lift for any home or shop owner.

Other mechanical parking systems can appear unsightly in home garages. Plus, most lifts feature four columns that obstruct access around the garage. Autostacker has no posts whatsoever, so it looks like it belongs anywhere you put it. We know that low-profile vehicles often struggle to safely load onto lifts without the help of pricey specialty ramps. Autostacker features a patented, inclined platform that accommodates low-stance vehicles with ease. Solve your car stacking problems with the world's smartest low-profile home parking lift.



6,000-lb. (2,722 kg) Lifting Capacity



Wide Deck Platform

Tire Stop


Low-Profile Entry Ramp

Patented Door-Sentry™ car door protectors

Tandem Direct-Drive Cylinders

Synchronizing flow control provides level lifting.

Automatic Safety Locks



AUTOSTACKER SPECIFICATIONS AND FEATURES

There are enough features and cool parking lift tweaks on Autostacker to keep you safer, happier and better cared for than with virtually any parking lift out there. Everything about the Autostacker screams, "Upgrade!" From the impressive lift capacity and superior drive-through clearance to the simple, post-free design that fits in most parking spaces, this is the parking lift you want with all the protection you deserve.

DIMENSIONS

PL-6SR

- Overall Width: 103" (2,616 mm)
- Overall Length: 144" (3,658 mm)
- Platform Length: 124" (3,150 mm)
- Platform Width: 83.75" (2,127 mm)
- Ramp Height (entry): 2" (51 mm)
- Under Clearance on top lock: 80" (2,032 mm)

PL-6SRX (Extra Wide)

- Overall Width: 111" (2,815 mm)
- Platform Width: 91.75" (2,331 mm)

POWER


Standard - Power Unit Console

- Single unit operation
- Motor Voltage: 208-240 VAC / 50/60Hz / 1Ph
- Power Consumption: 1,500 Watts
- Motor Horsepower: 2 HP
- Starting Amps: 25A
- Normal Running Amps: 12-18A

Optional multi-unit power unit console available (Operates up to 12 lifts)

OPTIONAL ACCESS PANEL (51.5" x 30")

SOLD SEPARATELY

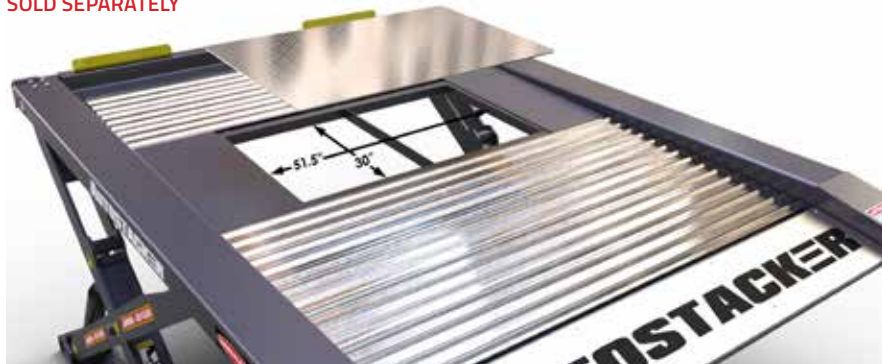

WHAT'S INCLUDED

- Right & left side superstructure
- Front wheel trough
- Ramp assembly with logo plate
- Lower front tie-bar
- Galvanized decking sections
- Front tire stops
- Power unit control console
- Complete assembly parts package
- Installation and operators manual

SPEED OF RISE

- **Standard power unit console:** 35 seconds
- **Optional multi-unit power unit console:** 20 seconds



AUTOSTACKER